

## Gerotor Pump IFC 1100-2

Article-No.: Z-P 2000 0600



Design	
Weight	660 g
Medium	Water/dielectric
Material pump	PEEK
Motor control	Sensored or self-sensing
Hydraulic power	1100 l/h at 2.0 bar
Voltage range	9-60 VDC
Motor	BLDC

### Main Characteristics

- Electrically powered high-performance pump for water circuits or circuits with dielectric media.
- Equipped with a BLDC motor and intelligent control electronics (using IFC, Intelligent Flow Control).
- Intelligent performance control depending on load status, processor temperature and ambient/medium temperature
- Performance data at 50°C medium water/glycol and 50°C ambient temperature: 1100 l/h at 2 bar.

### Function

Pump: Displacement pump (gerotor), self-priming

Motor: BLDC external rotor


Control electronics: Customer-specific interfaces (CAN, LIN, UART, etc.) available, alternatively, ON/OFF

Software: To integrate our product into the CAN vehicle architecture, we automatically supply the DBCfile if required

### Connections

- Length: 107 mm
- Width: 92 mm
- Height: 81 mm
- Hydraulic connections: -08 Wiggins tube connectors (other connections, e.g. JIC available)
- Electric connection: 8STA0 10-98 PN, on vehicle side 8STA6 10-98 SN
- Mounting: 3 M5 screws

Measurements – Operating points

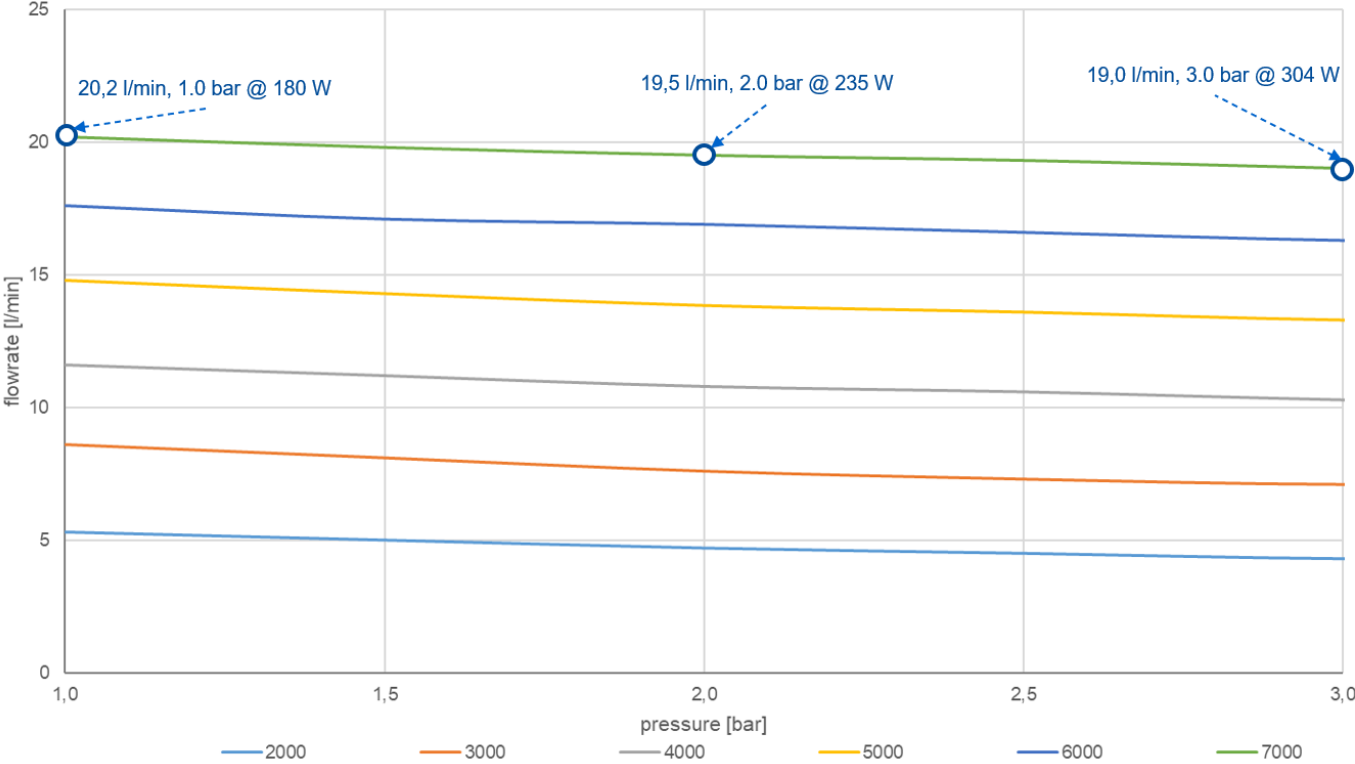

Medium: Water/Glycol